

1/10

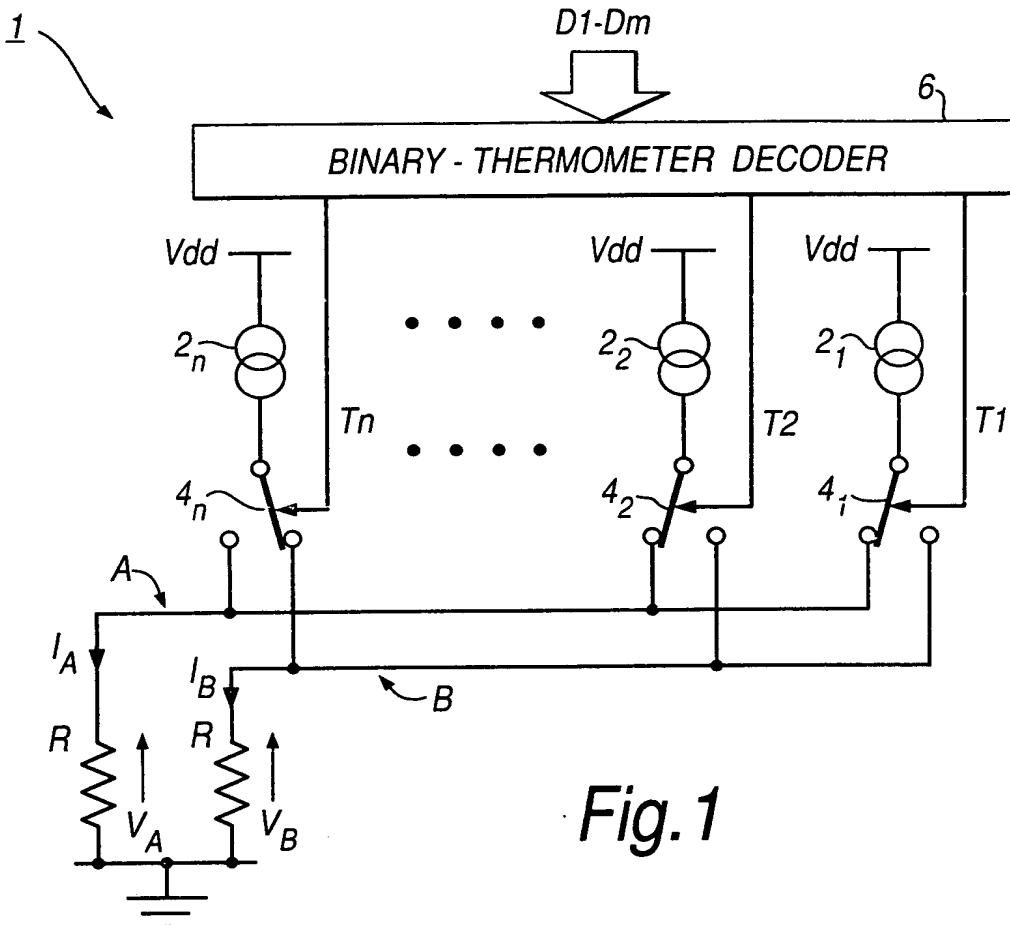


Fig. 1

BINARY INPUT WORD			THERMOMETER-CODED SIGNALS						
D_3	D_2	D_1	T_7	T_6	T_5	T_4	T_3	T_2	T_1
0	0	0	0	0	0	0	0	0	0
0	0	1	0	0	0	0	0	0	1
0	1	0	0	0	0	0	0	1	1
0	1	1	0	0	0	0	1	1	1
1	0	0	0	0	0	1	1	1	1
1	0	1	0	0	1	1	1	1	1
1	1	0	0	1	1	1	1	1	1
1	1	1	1	1	1	1	1	1	1

Fig.2

2/10

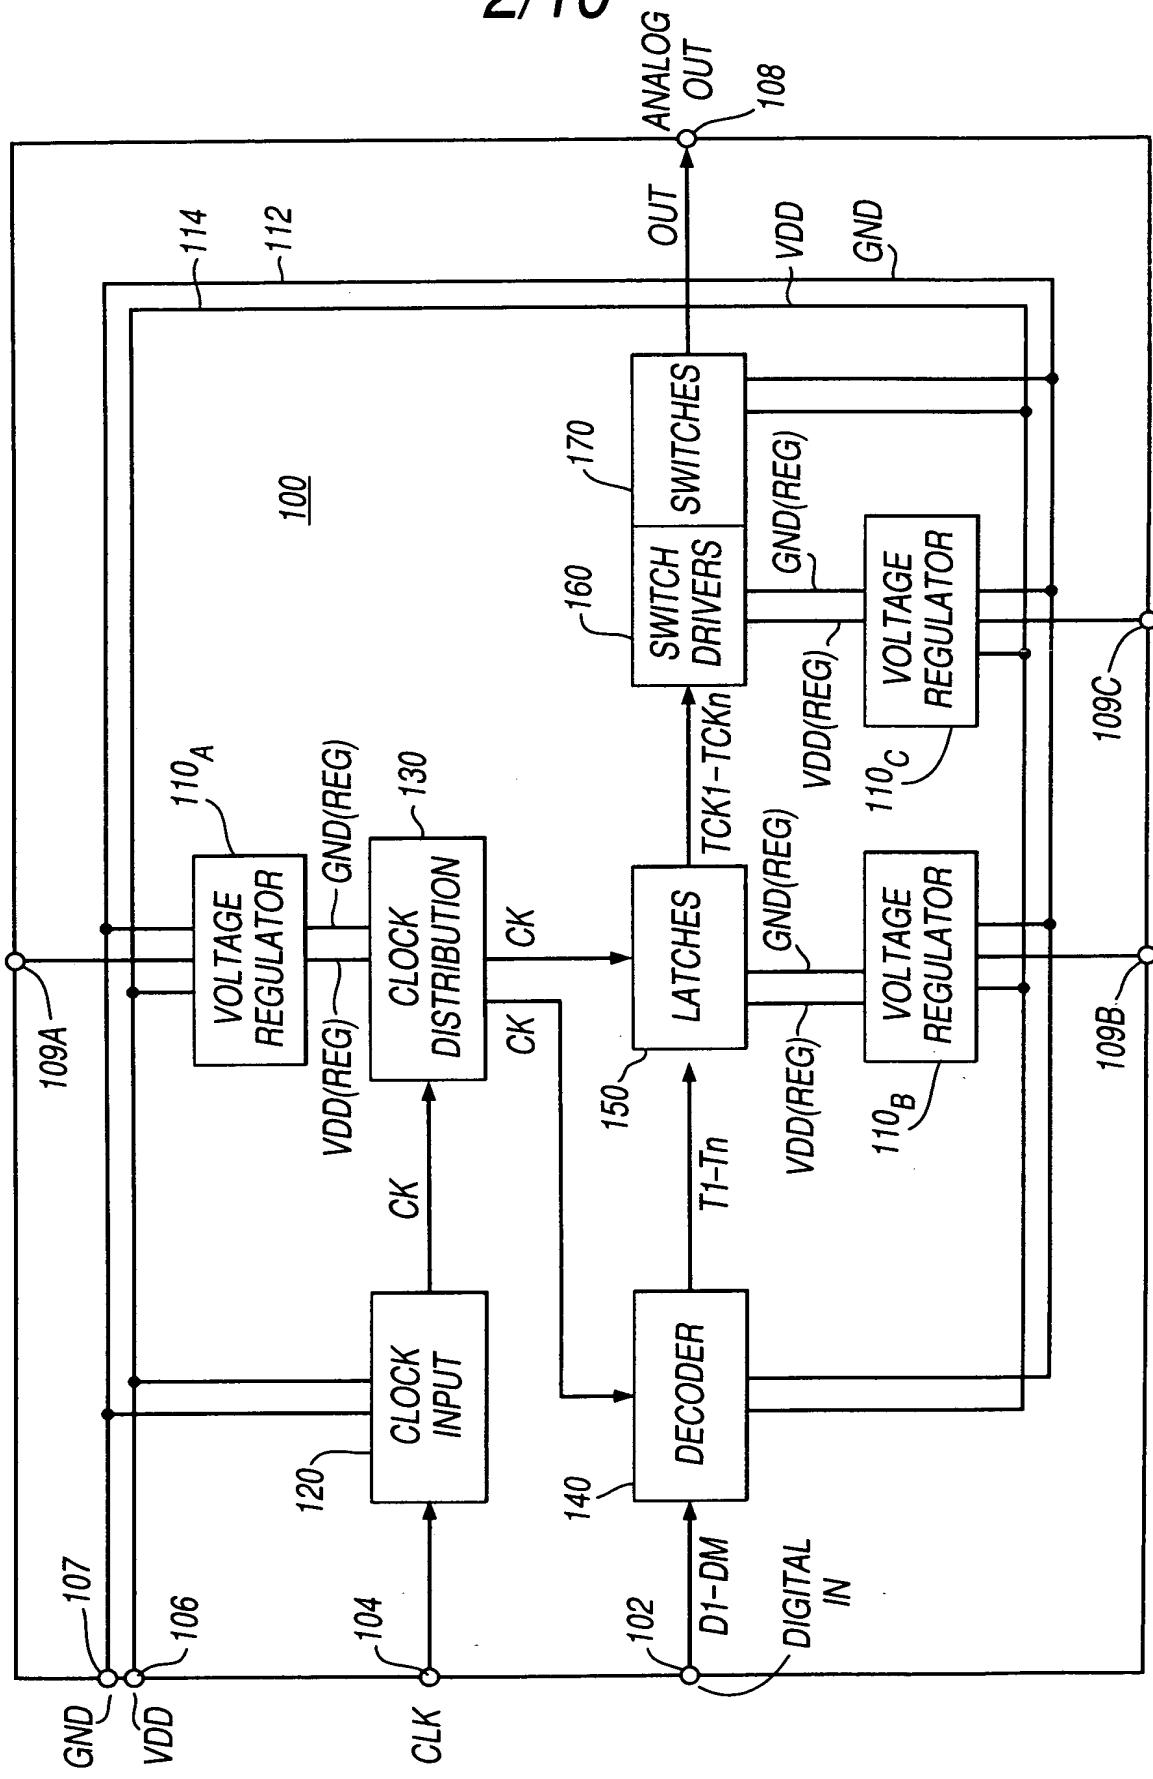


Fig.3

3/10

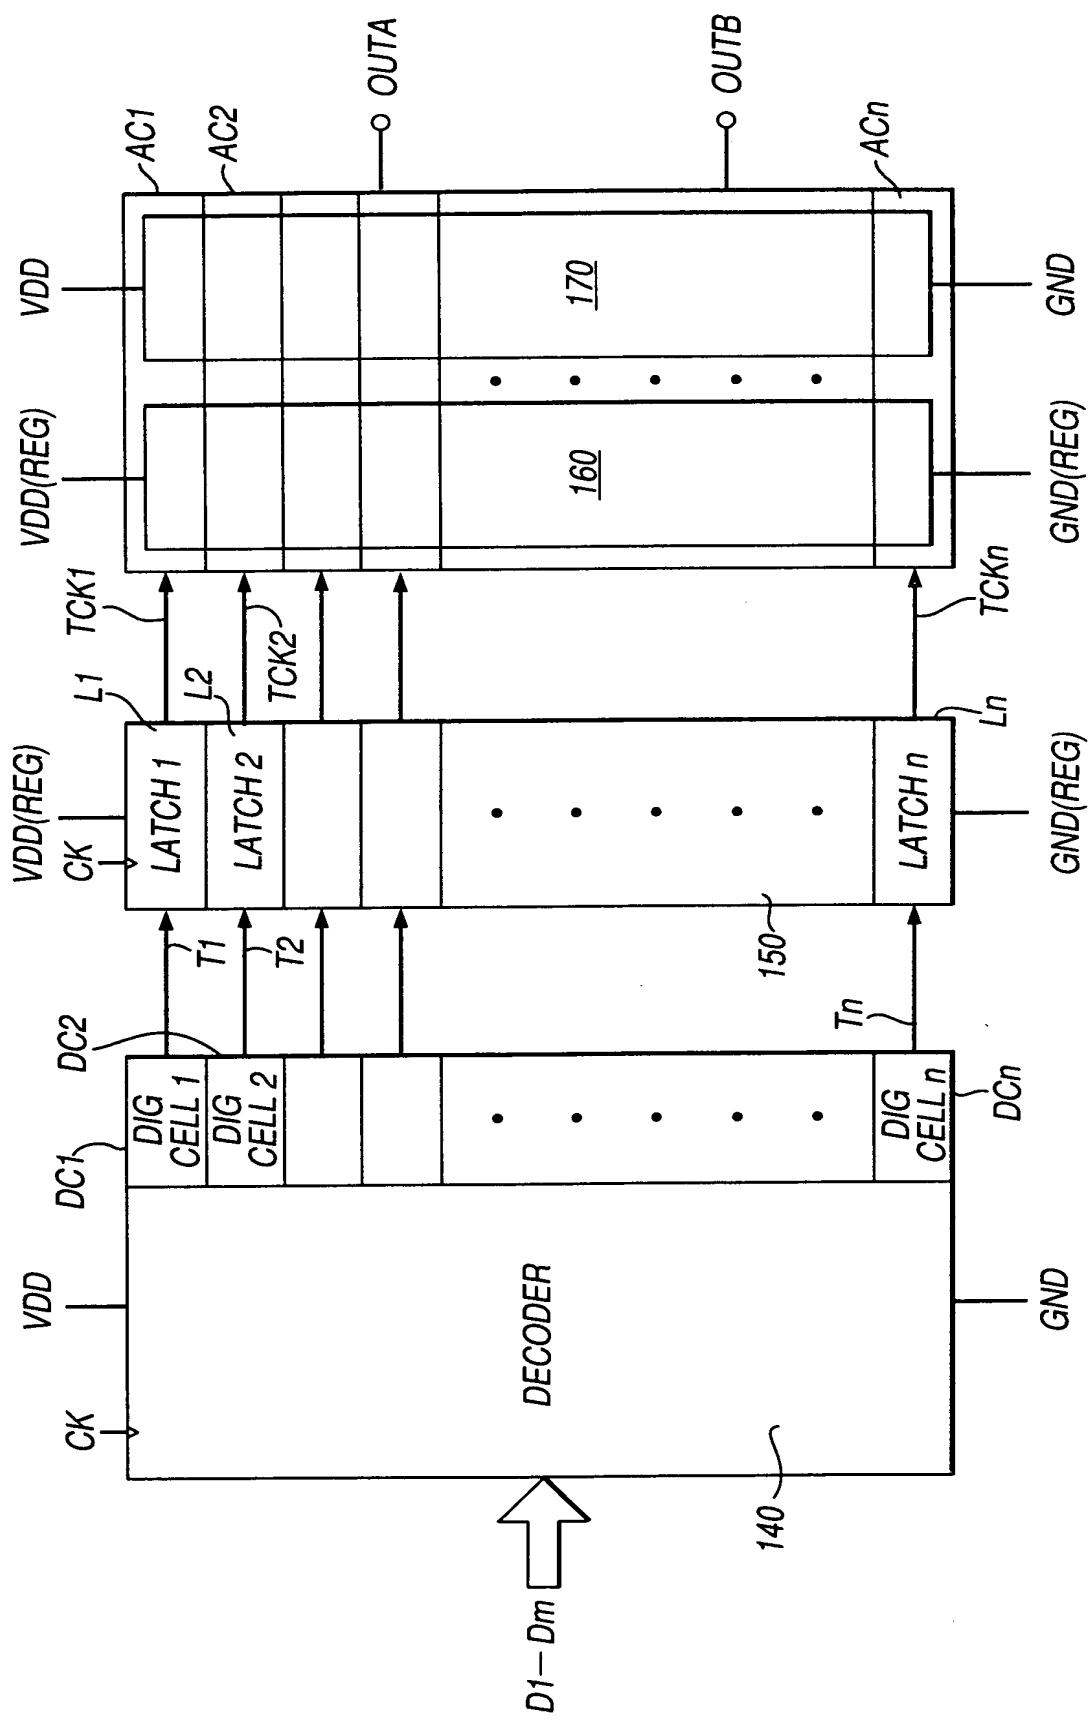


Fig. 4

4/10

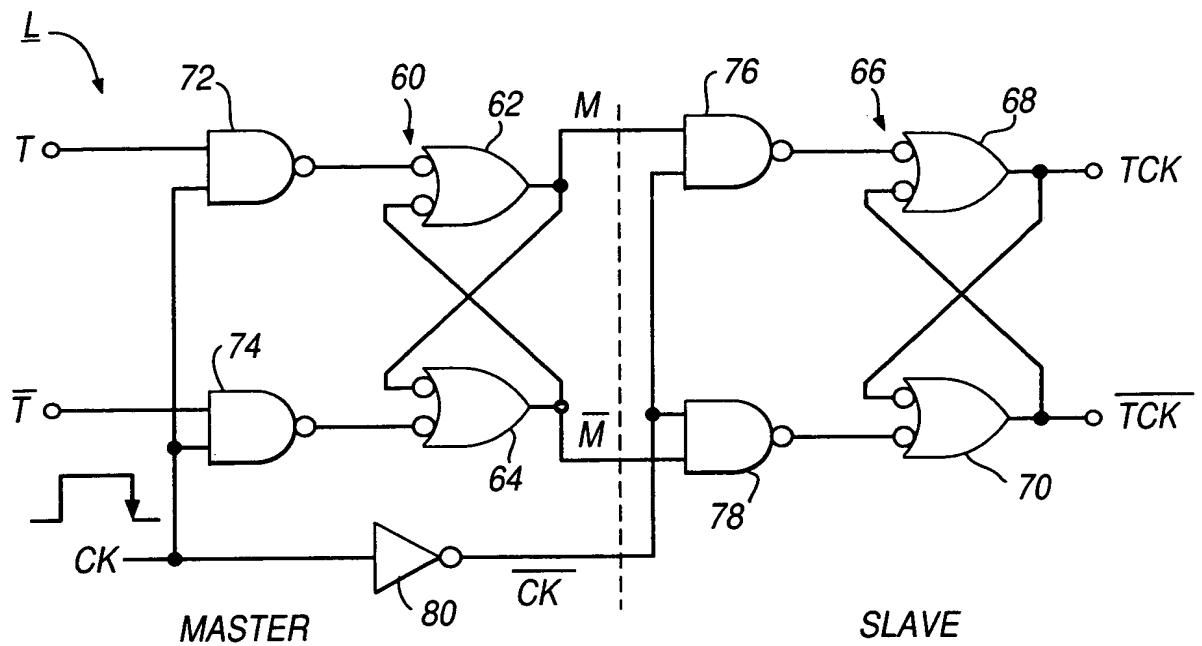


Fig.5

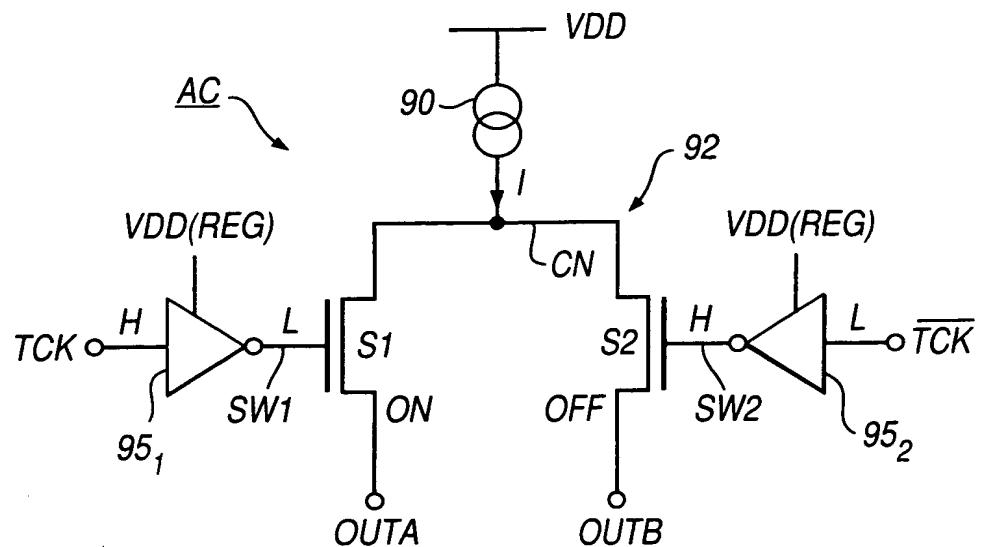


Fig.6

5/10

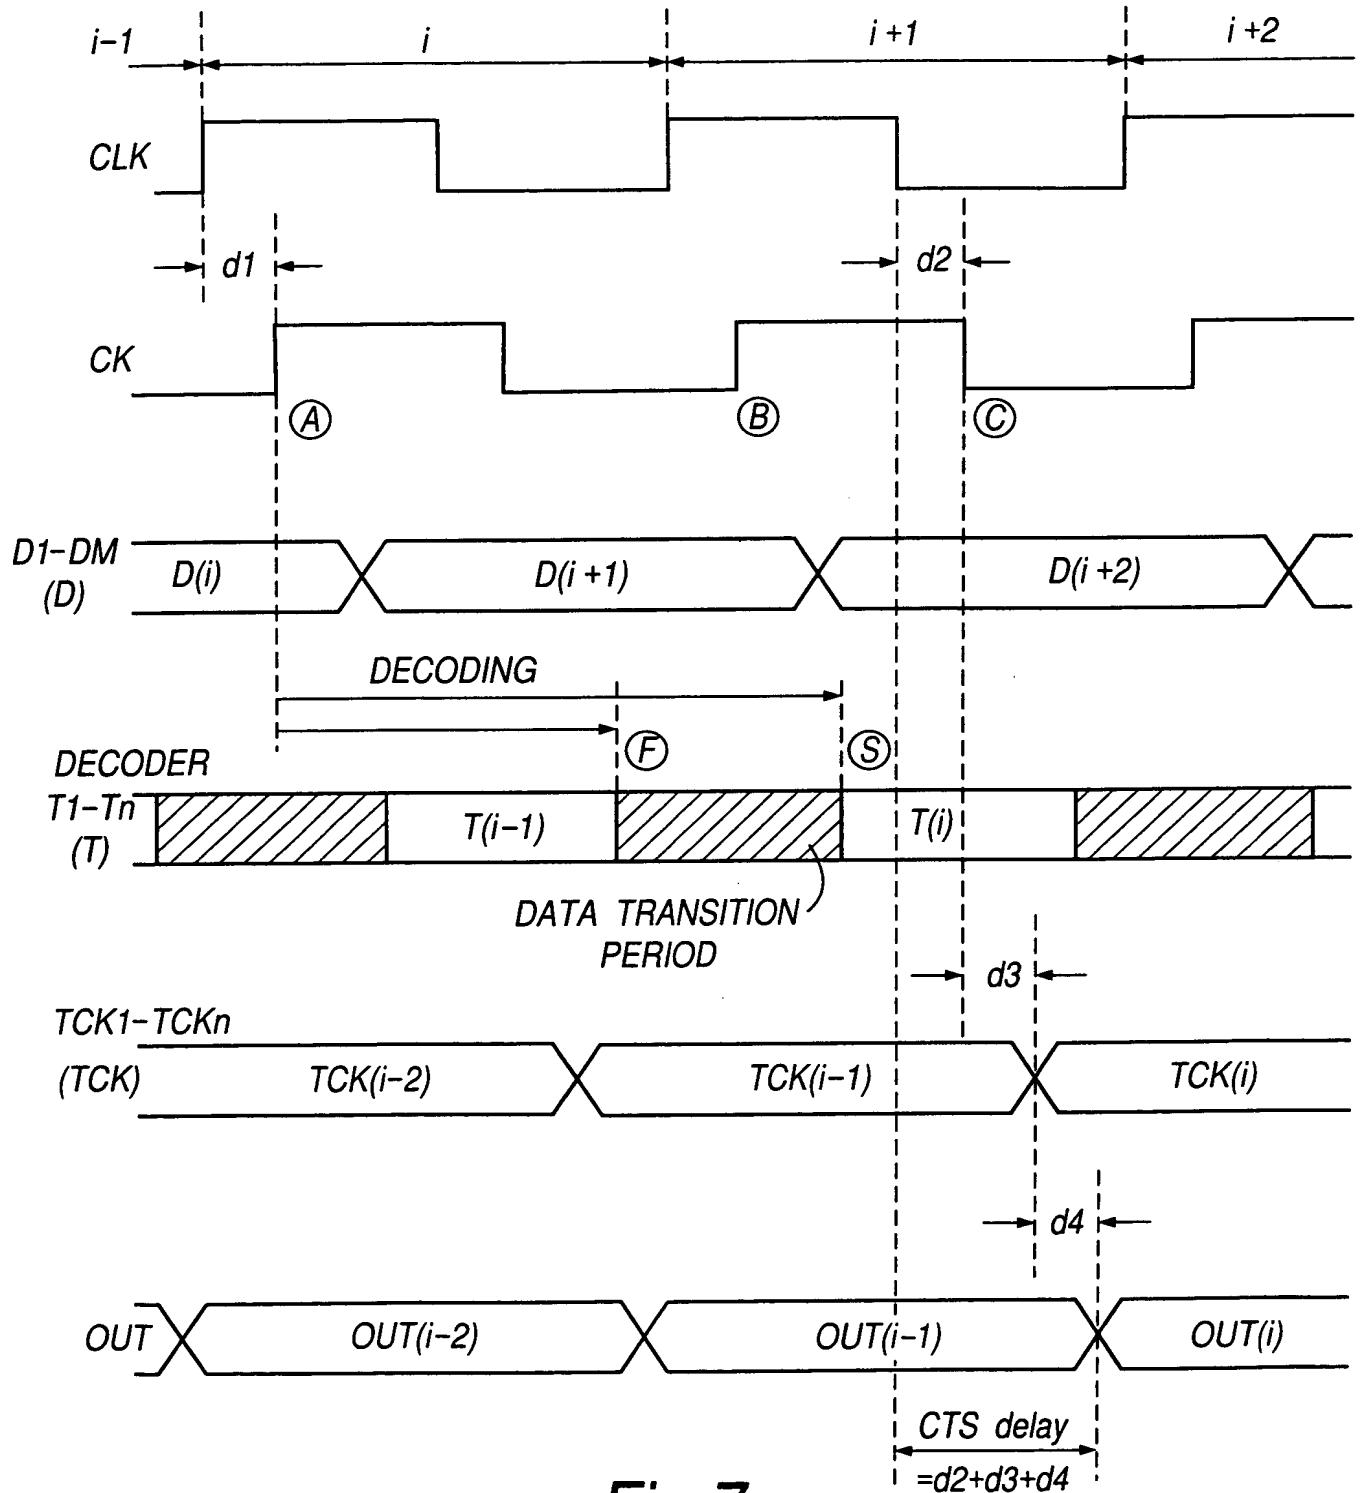


Fig.7

6/10

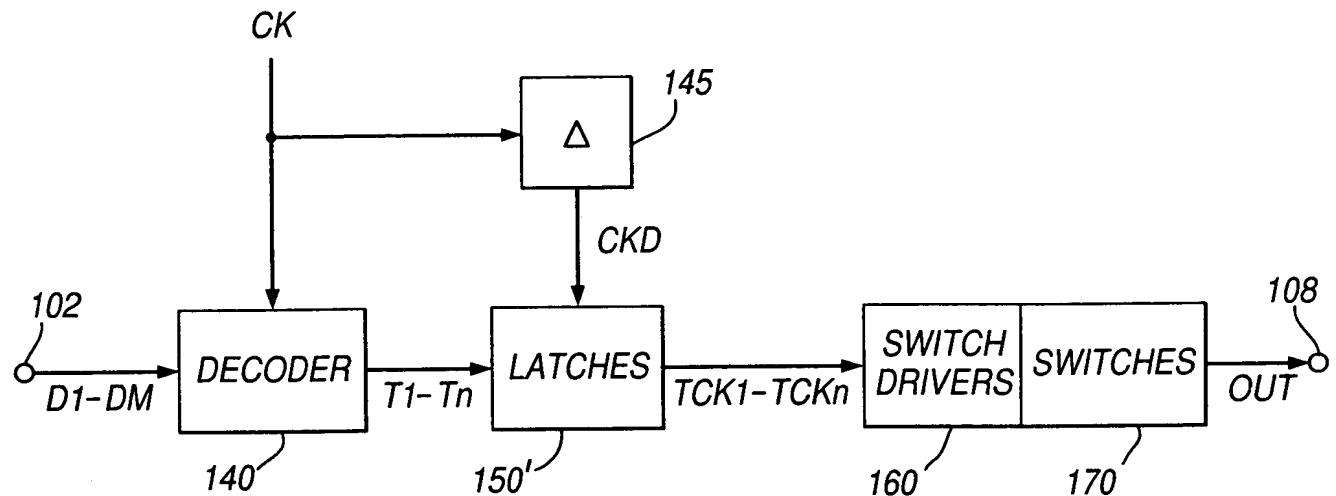


Fig.8A

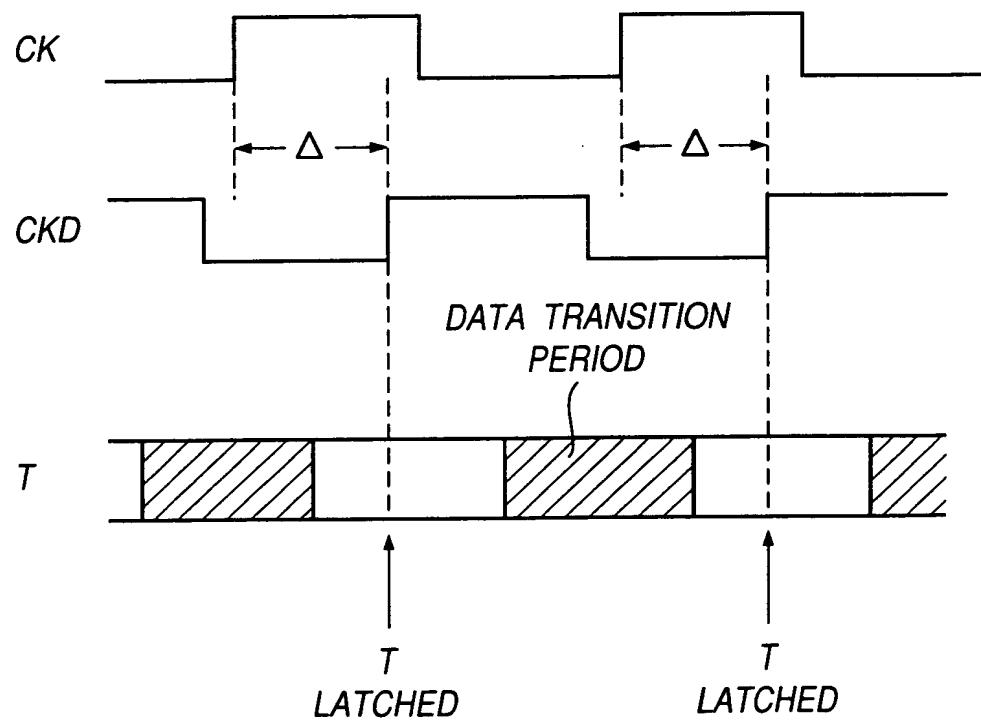


Fig.8B

7/10

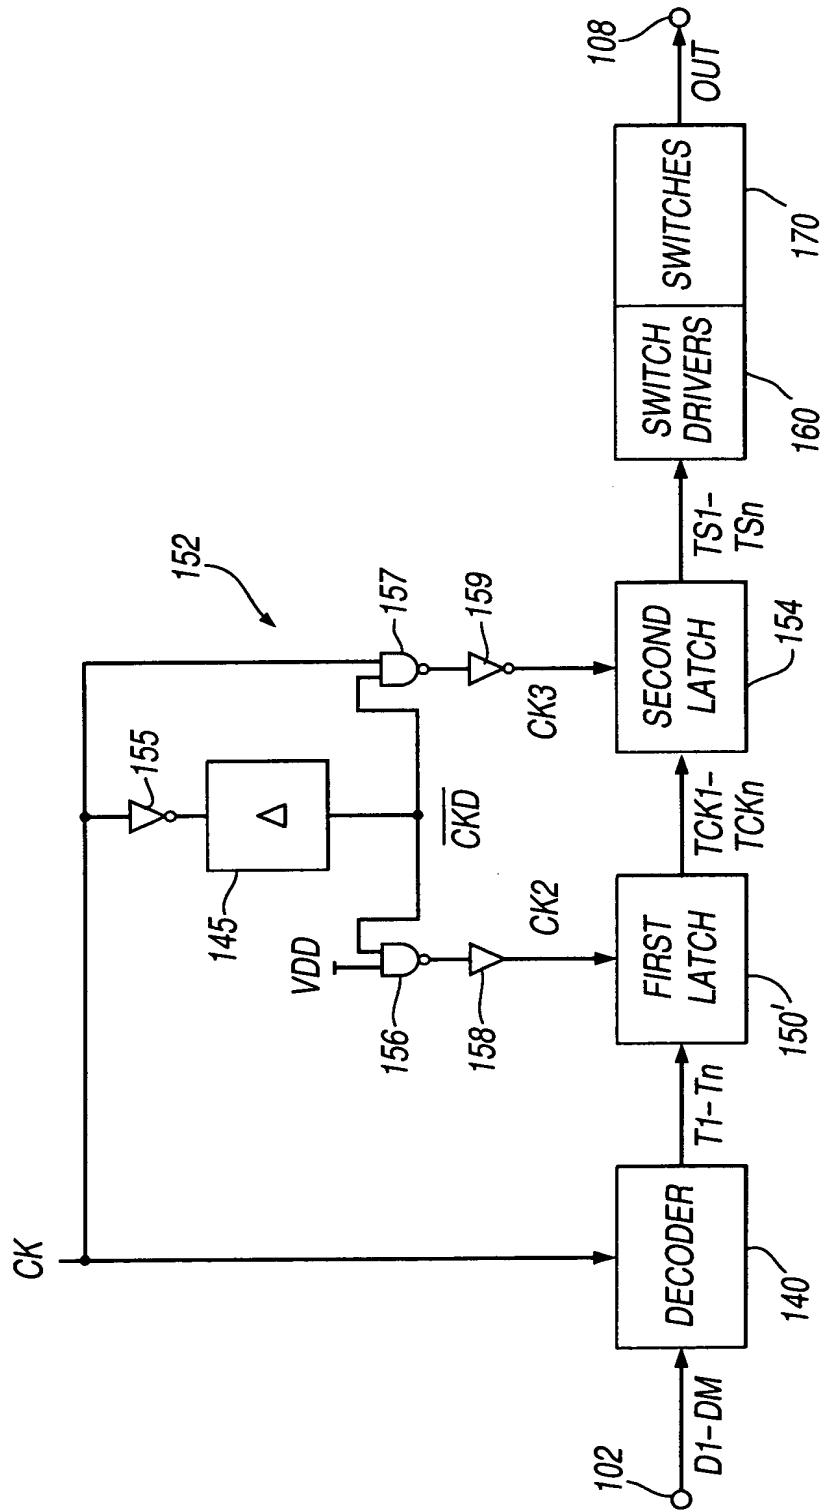


Fig.9A

8/10

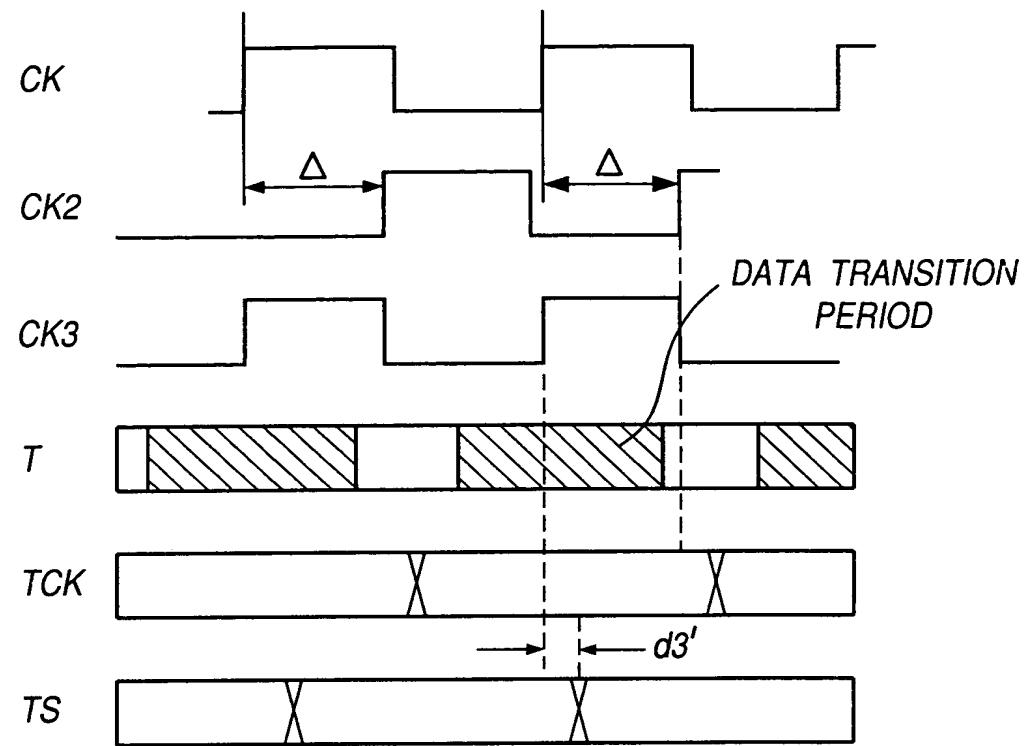


Fig.9B

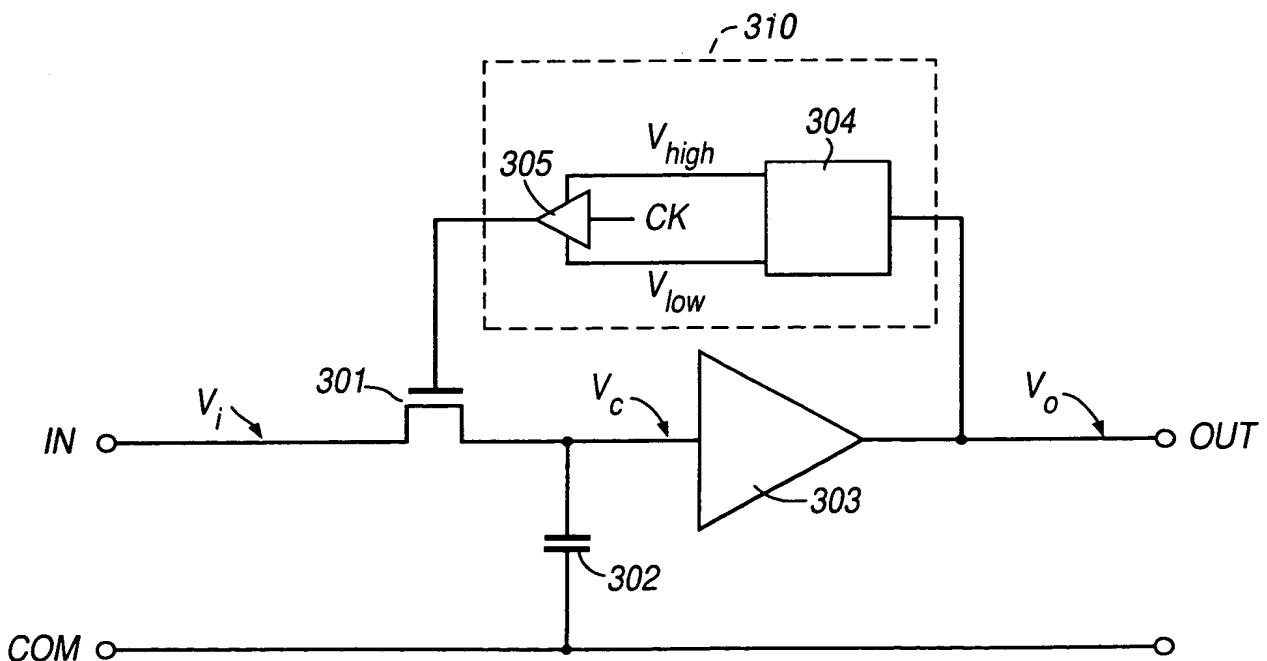


Fig.12

9/10

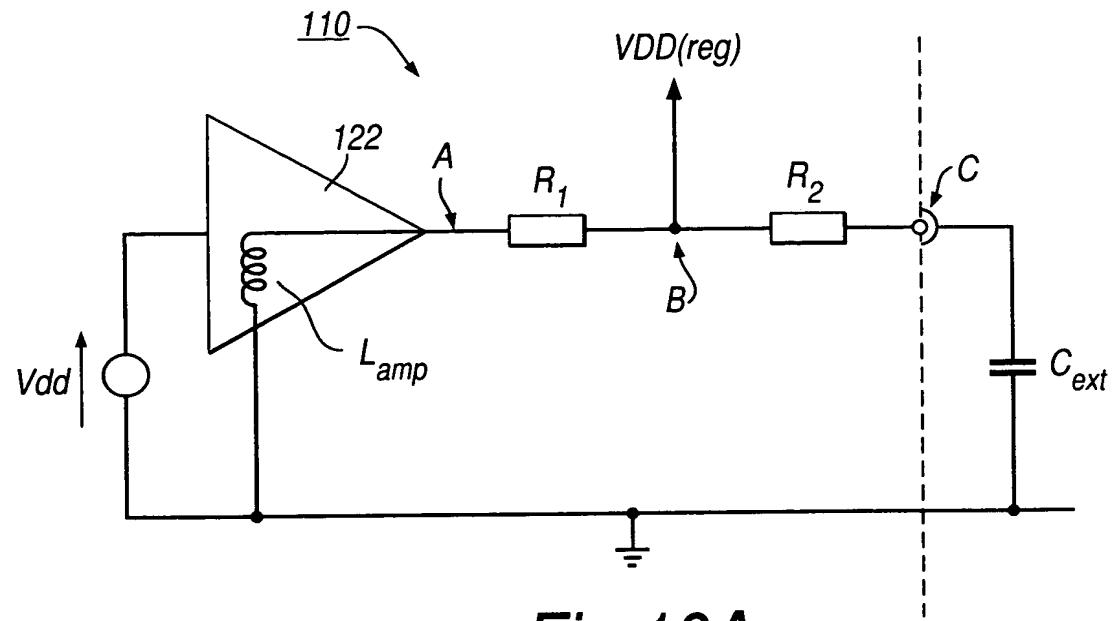


Fig.10A

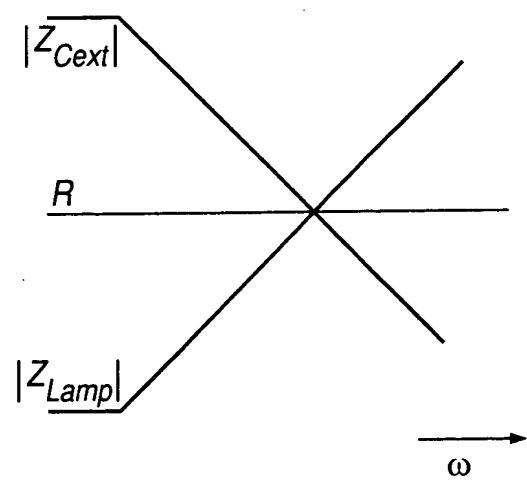


Fig.10B

10/10

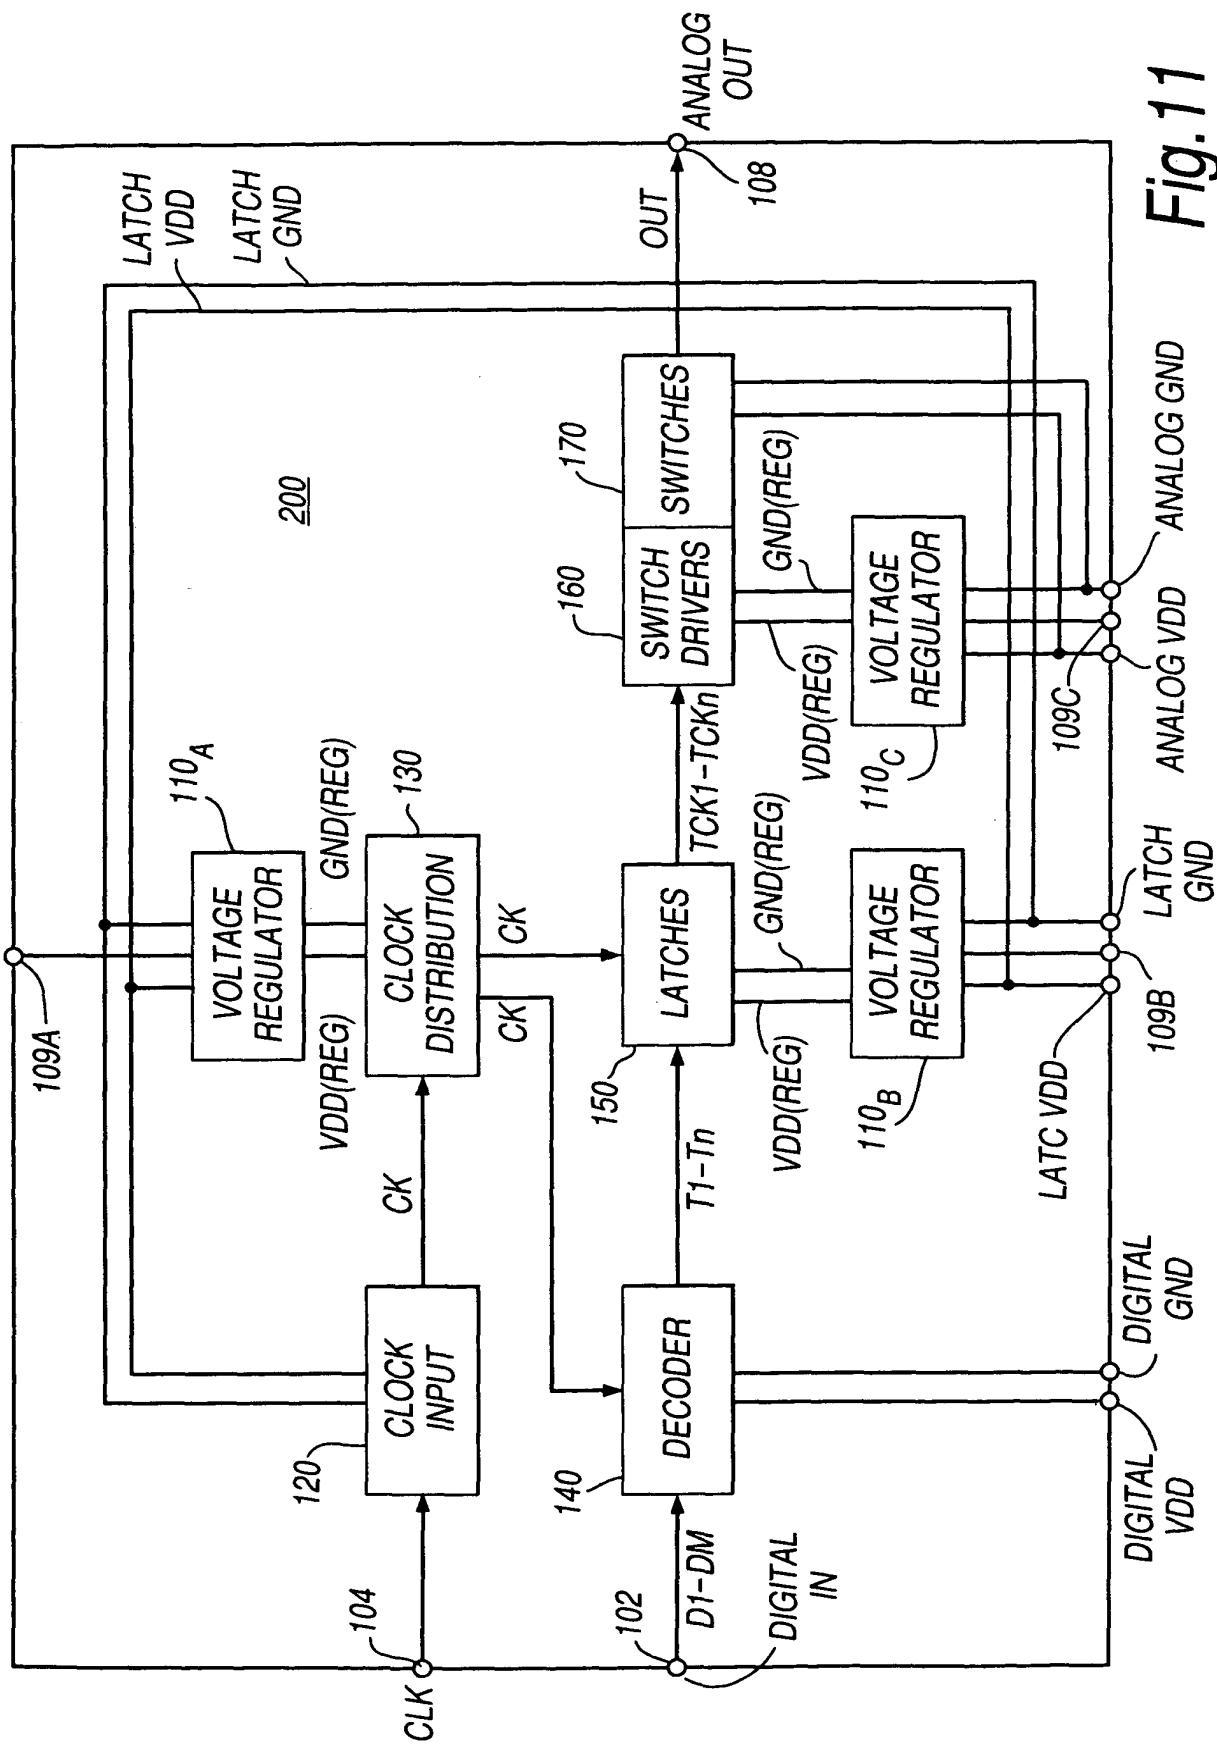


Fig. 11